




**SWITCH ON.
GO WIRELESS.**

BROMIC SMART-HEAT™ CONTROLS


CONTROLS SIMPLE, SMART AND WIRELESS

Bromic's control options make the operation of your outdoor heater even more convenient. Choose from simple On/Off remotes to dimmer controls to fully integrated smart home solutions.



ON | OFF
CONTROLLER

Bromic's independent 'On/Off' control will let you control up to two electric or four gas heaters across two separate circuits from up to 100ft away. The wireless transmitter is fully portable or can be easily mounted with the included double-sided adhesive/screws.



DIMMER
CONTROLLER

Move beyond the base-model wireless controller with the Bromic Dimmer Controller. Suitable for our electric heaters, the dimmer control provides the ability to precisely adjust the electric heat output in 1% increments, or quickly jump by 25% increments, from up to 100ft away.



ECLIPSE DIMMER
CONTROLLER

Set up the perfect ambience with the Bromic Eclipse Dimmer Control and wireless remote. Suitable for our Eclipse Pendant and Portable series, the Bromic Eclipse Dimmer Remote can quickly dim the lighting in 1% increments and the heating output (0%, 33%, 66%, 100%) to create the perfect ambience - every time.



MASTER
REMOTE

Our Bromic Master Remote is invaluable for larger venues. Offering user-programmable customization, the Bromic Master Remote gives you full control over an unlimited number of heaters in up to 6 groups within its 100ft range when paired with our Dimmer Controllers. For our Eclipse collection, we offer an Eclipse Master Remote to adjust both heat and light.




SMART-HEAT™
LINK

Pair Bromic's heating control options with the Bromic Smart-Heat Link to create a seamless communication between Bromic outdoor heaters and your smart home controls technology. The Bromic Smart-Heat Link requires a RS232 port and is compatible with the leading home automation systems on the market, such as Control 4, Crestron, Lutron, Nomad and many more!




CONTROLS SIMPLE, SMART AND WIRELESS

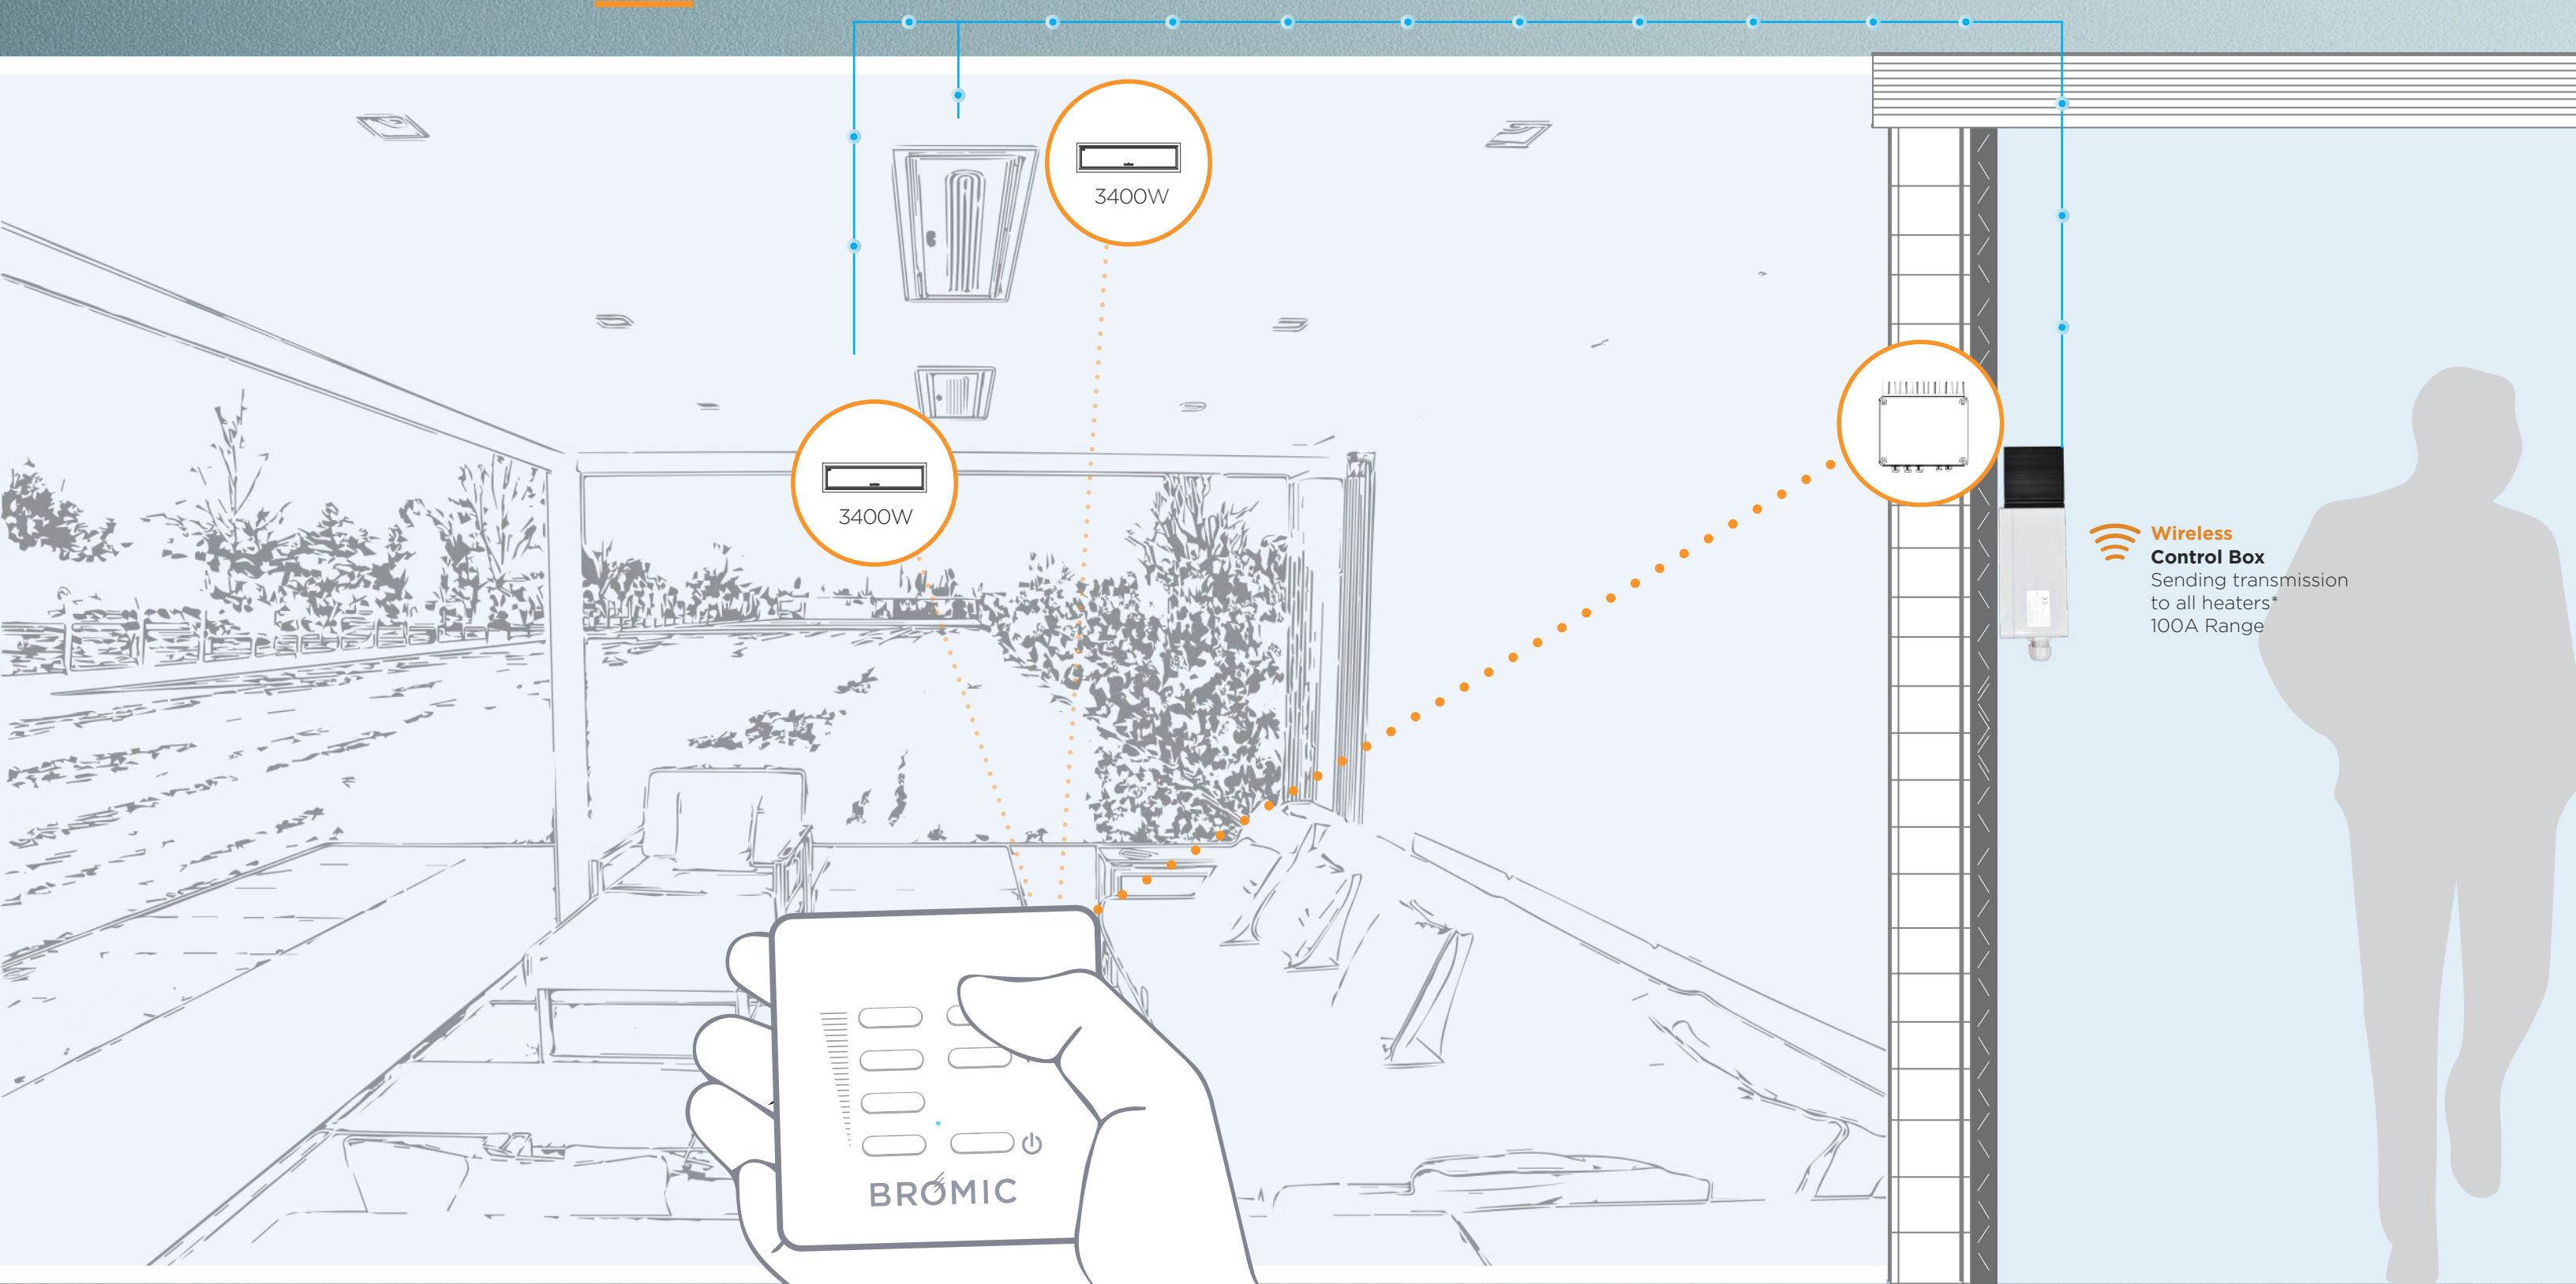

Outdoor area

Indoor room

 **Wireless Control Box**
Sending transmission to all heaters*
100A Range

 **Smart-Heat Wireless Dimmer Controller**

Allows the power output of a heater to be adjusted for perfect comfort, with the ability to adjust multiple units in unison with a single remote

*Image shown is for electric dimmer only



ON | OFF CONTROLLER

FOR BROMIC GAS & ELECTRIC HEATER

MODEL NUMBER	BH3130010-2
POWER SUPPLY	110/230VAC, 31A max, Single Phase
NO OF CHANNELS	2
MAX OUTPUT POWER CHANNEL	3400W @ 230VAC 3400W @ 208VAC 1500W @ 110VAC
FUSE PROTECTION	32A (FWC high speed)
RECEPTION FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-4° to 122°F
DIMENSIONS	8" x 5.7" x 3.3"
PROTECTION CLASS	IP54



DIMMER CONTROLLER

FOR BROMIC ELECTRIC HEATERS

MODEL NUMBER	BH3130011-2
POWER SUPPLY	208/240/277V 50/60Hz (29A.max)
MAX OUTPUT POWER CHANNEL	6800W @ 240VAC (28.5A) 6800W @ 277VAC (25A) 6000W @ 208VAC (29A)
FUSE PROTECTION	32A (FWC high speed)
CARRIER FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-4° to 86°F
DIMENSIONS	9" x 7.9" x 2.95"
PROTECTION CLASS	IP54



ECLIPSE PENDANT CONTROLLER

FOR BROMIC ECLIPSE ELECTRIC PENDANT HEATERS ONLY


MODEL NUMBER	BH3230007-1
POWER SUPPLY	220/240VAC, 17A min, Single Phase
CHANNEL 1	Element 1 - 66% Heat Setting
CHANNEL 2	Element 2 - 33% Heat Setting
FUSE PROTECTION	20A (FWC high speed)
CARRIER FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-4° to 122°F
DIMENSIONS	11.5" x 6.2" x 3.15"
PROTECTION CLASS	IP54



ECLIPSE WIRELESS MASTER REMOTE

COMPATIBLE WITH ECLIPSE CONTROLLERS ONLY

MODEL NUMBER	BH3623002-1
POWER SUPPLY	CR2430 battery (3V)
CARRIER FREQUENCY	916MHz
MODULATION	FSK
CONSUMPTION WHEN TRANSMITTING	10mA
WORKING TEMPERATURE	14° to +131°F
WIRELESS RANGE	100 ft



WIRELESS MASTER REMOTE

COMPATIBLE WITH BROMIC DIMMER CONTROLLERS ONLY


MODEL NUMBER	BH3130012-2
SUPPLY	CR2430 battery (3V)
CARRIER FREQUENCY	916 MHz
MODULATION	FSK
CONSUMPTION WHEN TRANSMITTING	10mA
WORKING TEMPERATURE	14° to 131°F
WIRELESS RANGE	100 ft



SMART-HEAT LINK HOME AUTOMATION PLUG-IN

COMPATIBLE WITH BROMIC CONTROLLERS

MODEL NUMBER	BH3130097-1
SUPPLY	+5VDC
CARRIER FREQUENCY	916 MHz
WORKING TEMPERATURE	14° to 131°F
WIRELESS RANGE	100 ft



EXPLORE THE POSSIBILITIES

With the Bromic Smart-Heat™ complimentary design service, designing a solution to optimize heating for your outdoor spaces is simple.



BROMIC.COM

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

02.2023