

phantomSchwank Series

The dark knight of patio heaters.

The phantomSchwank Series powerful performance and functionality redefine cutting-edge technology for outdoor comfort. Make the most of your patio space with phantomSchwank's intuitive smart wireless control, versatile mounting options, and wind resistance.



Optimal Serviceability

Accessible screwless latch.
A swing-down cabinet for easy maintenance.
Field conversion from NG to LP.

Elusive Design

Black powder-coated finish.
Low profile model.
Intricate detailing of the front grille.
Ultra-low clearances with versatile mounting configurations.

Built-In Smart Wireless Controls

Access via wireless mobile app/
connect to a Smart device.
Seamlessly pair with Schwank.ONE.
Flexibility to manage "zones" within
the patio space.

Engineered for Performance

Energy-efficient EC Motor.
Built with Marine-grade Aluminum Alloy.
Optimized reflector for uniform heat distribution.
Wind resistant fully enclosed model.


→ Features

- BTU_h Input range: 35,000 – 115,000
- Lengths: 12 and 17 ft.
- Mounting: 8'-17' heights
- Fuel: 2-Stage Natural Gas (standard) or Propane (converted)
- Warranty: 10-year burner, 10-year tubes, 3-year components
- Motor: Energy-Efficient Direct Drive EC Motor



→ Dimensions and specifications

With a wide range of sizes and mounting options available, choose the ideal phantomSchwank model to use in your patio, or outdoor environment.

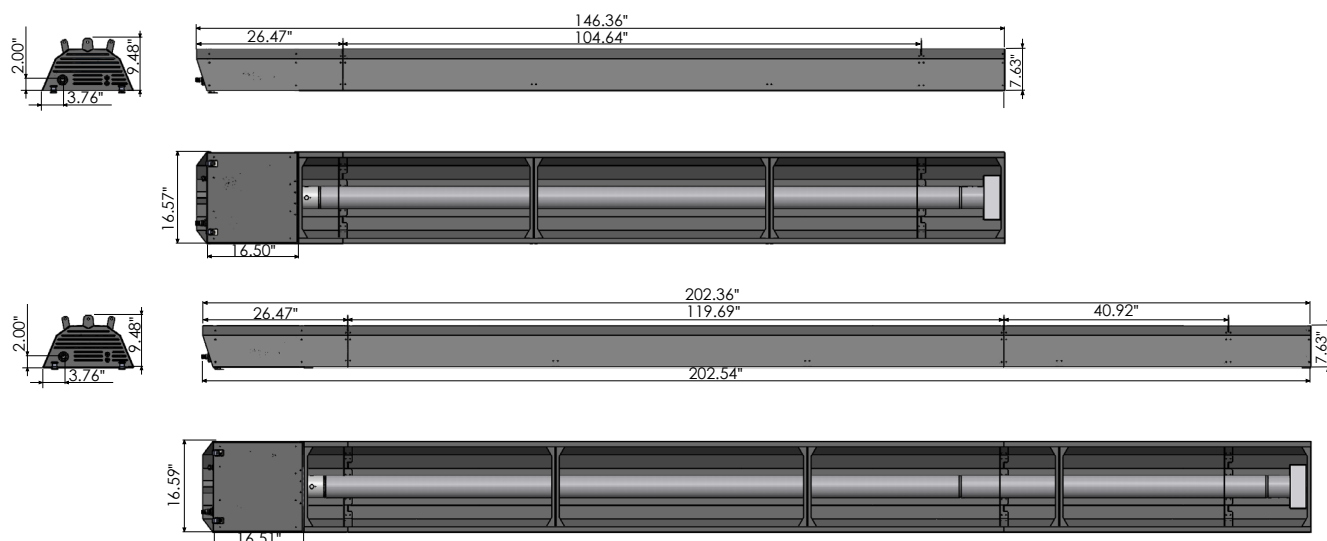

Model	Fuel Type	Input Rating (BTU/H)		Overall Length (ft)	Material: Housing	Weight (lbs)	Conversion kit part number
		High	Low				
STP-TA05-10-BN	NG	50,000	35,000	12	Marine-Grade Aluminum	95	JS-0554-LL-TP
STP-TA08-10-BN	NG	80,000	60,000	12		96	JS-0554-NL-TP
STP-TA11-15-BN	NG	115,000	80,000	17		127	JS-0554-PL-TP

Note: Conversion kit is available to convert standard NG heater to LP model

*Approximate gross shipping weight.

→ Clearance to combustibles

Model Input Rate	Suspended horizontally			Suspended at an angle up to 45 degrees				Burner End BE	Tube End TE
	A	S	C	D	B	F	C		
50,000	4"	20"	42"	4"	3"	40"	44"	24"	48"
80,000	5"	24"	62"	5"	3"	54"	60"	24"	48"
115,000	5"	26"	74"	5"	3"	62"	70"	24"	48"

