

# UH SERIES

## SEPARATED COMBUSTION GAS-FIRED UNIT HEATER



### Optimal Fuel and Comfort Benefits with Unsurpassed Features

The UH series line of gas-fired, tubular exchanger, induced draft hot air heaters are available for use in commercial, industrial, and agricultural applications. This line of heaters features a low profile design with a durable, powder-coated black enamel exterior and stainless steel louvers for an exceptional aesthetic appeal. The UH series can be used as separated combustion or power-vented combustion out-of-the-box.



### RE-VERBER-AIR BENEFITS

- Individual In-Shot Burners
- Reduced Energy Consumption
- Durability
- Flexibility

### PRODUCT FEATURES

- Compact, aesthetically pleasing construction
- Easy to install with minimal assembly required
- Powder-coated black enamel housing
- Swept wing air propeller, for efficient air movement and noise reduction with finger-proof fan guard
- Stainless steel discharge louvers with adjustable winglets
- External heater operation indicator lights
- Various mounting options including 180° rotation on all UH models

# UH SERIES

## SEPARATED COMBUSTION, GAS-FIRED UNIT HEATER

### PRODUCT SPECIFICATIONS



**Input Range:**  
30,000 to 75,000 BTU/h



**Gas Type:**  
Natural or Propane Gas



**Heat Exchangers:**  
Tubular Aluminized Steel



**Certification:**  
ETL Listed North America, Commercial/Industrial,  
Residential Indoor



**Limited Warranty:**  
1 (Components) - 5 (Exchangers) - 10 (Burners)



**Voltage:**  
120/60 Hz. VAC, Single Phase Primary  
24 V Controls Connection

MODEL #	FLA AMPS	MOTOR TYPE	MOTOR HP	APPROX. CFM <sup>1</sup>	FAN DIAMETER	AXIAL FAN ROTATION	INLET & VENT CONNECTION	GAS CONNECTION	DIMENSIONS
UH-30	2.7	SP	1/15	500	10"	CCW	3" O.D.	1/2" N.P.T.	28"L x 17"D x 12"H
UH-45	2.7	SP	1/15	750	10"	CCW	3" O.D.	1/2" N.P.T.	28"L x 17"D x 12"H
UH-60	4.0	PSC	1/12	975	14"	CCW	4" O.D.	1/2" N.P.T.	28"L x 17"D x 17"H
UH-75	4.0	PSC	1/12	1250	14"	CCW	4" O.D.	1/2" N.P.T.	28"L x 17"D x 17"H

<sup>1</sup> Calculated or approximate number.

### AVAILABLE UH MODELS & CLEARANCES


MODEL #	GAS <sup>2</sup>	INPUT BTU/h	OUTPUT BTU/h	MOUNTING HEIGHTS <sup>3</sup>	APPROX. HEAT THROW	AVG. AIR TEMP RISE	VENT LENGTH		WEIGHT	CLEARANCES TO COMBUSTIBLES (IN INCHES)				
							MIN.	MAX.		FRONT	TOP & BOTTOM	ACCESS SIDE	NON-ACCESS SIDE	VENT CONN.
UH-30	Nat or Prop	30,000	24,000	8'-12'	26 Ft.	45°F	3 Ft.	30 Ft.	77 Lbs.	60"	1"	6"	1"	1"
UH-45	Nat or Prop	45,000	36,000	8'-14'	28 Ft.	45°F	3 Ft.	30 Ft.	77 Lbs.	60"	1"	6"	1"	1"
UH-60	Nat or Prop	60,000	48,000	10'-16'	37 Ft.	45°F	3 Ft.	30 Ft.	98 Lbs.	60"	1"	6"	1"	6"
UH-75	Nat or Prop	75,000	60,000	10'-18'	39 Ft.	45°F	3 Ft.	30 Ft.	98 Lbs.	60"	1"	6"	1"	6"

<sup>2</sup> Specify natural (Nat) or propane (Prop) gas.


<sup>3</sup> Factory recommended mounting heights are provided as a guideline. Actual conditions may dictate variations from the above data.

Always maintain the published clearances to combustibles. Clearances published in UH Series manual and on warning label supersede data shown on this brochure.

Front View:

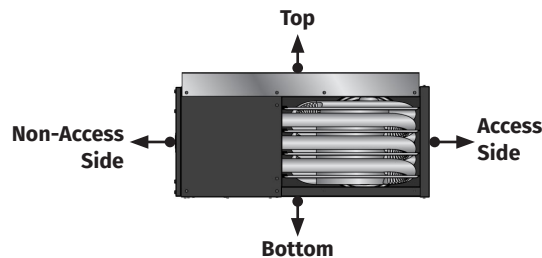

Side View:

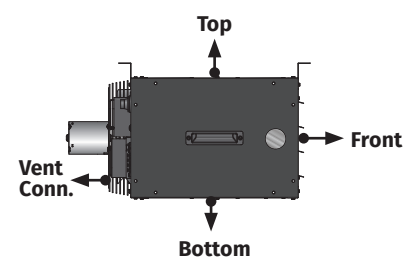

216 Avenida Fabricante Suite 207 San Clemente, CA 92672  
(760) 779-1352

[www.gasoutdoorpatioheaters.com](http://www.gasoutdoorpatioheaters.com)



Form No. LBUH-1M-05/22\_r1-05/23 (PM)

